

[2016-New Exam Collection 400-351 Dumps And 400-351 New Questions (1-10)

2016 July Cisco Official New Released 400-351 Q&As in Lead2pass.com! 100% Free Download! 100% Pass Guaranteed! 2016 get prepared with fully updated Cisco 400-351 real exam questions and accurate answers for 400-351 exam. Lead2pass IT experts review the 400-351 newly added questions and offer correct Cisco 400-351 exam questions answers. 100% pass easily! Following questions and answers are all new published by Cisco Official Exam Center: <http://www.lead2pass.com/400-351.html> QUESTION 1 Refer to the exhibit, based upon the given configuration which two statement are true? (choose two)

```
radius-server local
server 10.10.10.10 auth-port
dot11 ssid ssid1 authentication
authentication network-eap ea
authentication key-management
infrastructure-ssid optional
interface Dot11Radio1
| ssid ssid1
| encryption mode ciphers aes-
radius-server local
nas 10.10.10.10 key Cisco
user cisco password Cisco
radius-server host 192.168.14
```

A. local RADIUS server is used B. No password is required everyone can join wireless network C. Users will be required to provide a username and password for authentication D. User will be required to provide a password only order to get access E. Remote RADIUS servers is used Answer: AC QUESTION 2 Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC?(Choose two) A. AP CAPWAP multicast B. SNMPv3 C. AP authentication D. Band Select Answer: BC QUESTION 3 Refer the exhibit. the created dynamic interfaces are bound to an interface group for a specific WLAN profile in a Cisco Wireless LAN Controller. You have noticed duplicated multicast streams on the wireless medium for the given WLAN profile. Which statement is correct?

Layer3 MGID Mapping:

Number of Layer3 MGIDs..... 4


Group address	VLAN	MGID	IGMP/MLD
239.0.1.2	101	12350	IGMP
239.0.1.2	102	12351	IGMP
239.0.1.2	103	12352	IGMP
239.0.1.2	104	12353	IGMP

A. Globalmulticast mode,global IPv6 config,and multicast listener discovery snooping have not been enabled. Enable this to avoid duplicate streams. B. Global multicast mode and internet group management protocol snooping have not been enabled . To avoid stream enable both . C. The controller creates different multicast groups IDs for each multicast address and VLAN and a result the upstream router sends one copy for each VLAN. Enable Multicast VLAN to avoid duplicate streams. D. The controller always uses layer 3 multicast group 10 for all layer 3 multicast traffic sent to the access point internet group management protocol snooping should be disabled to avoid duplicate streams. Answer: C QUESTION 4 Refer to the exhibit the autonomous AP has a corporate and guest SSID configured. The security team requested that you limit guest user traffic to DHCP ,DNS, and web browsing on the AP. Which configuration best satisfies the request?




A. access-list 101 permit udp any any eq 67 access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10128.10.15 eq 53 access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80 access-list 101 deny ip any any interface dot11radio 0 ip access-group 101 in B.

access-list 101 permit udp any any eq 67 access-list 101 permit udp 10.28.128.0 255.255.255 host 10128.10.15 eq 53 access-list 101 permit tcp 10.28.128.0 255.255.255 any eq 80 access-list 101 deny ip any any interface dot11radio 0 ip access-group 101 in C. access-list 101 permit udp any any eq 67 access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10128.10.15 eq 53 access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80 access-list 101 deny ip any any interface fast Ethernet 0 ip access-group 101 in D. access-list 101 permit udp any any eq 67 access-list 101 permit udp 10.28.128.0 255.255.255 host 10128.10.15 eq 53 access-list 101 permit tcp 10.28.128.0 255.255.255 any eq 80 access-list 101 deny ip any any interface fast Ethernet 0 ip access-group 101 in Answer: C QUESTION 5 Refer to the exhibit. The network operations center is using PI to collect and monitor the AVC data from a Cisco WLC. However no AVC information is showing up in Cisco PI. Based on this information from the Cisco WLC reason that Cisco PI is not showing the information is True? 28)

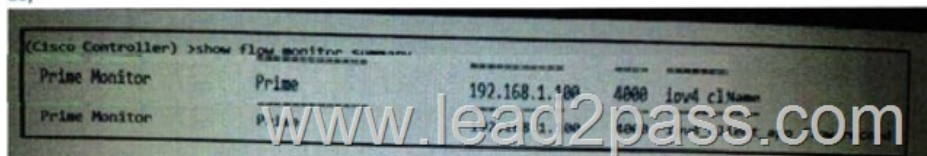

A. Cisco prime does not have the correct licensing installed. B. The monitor-Name and exporter-name do not match C. The Exporter-IP should be the IP address of the Cisco WLC D. The port number should be 9991. Answer: D QUESTION 6 Which two statements about LAG in the Cisco wireless LAN controller running Aire OS 8.0 are true? (choose two) A. LAG bundles all of the Cisco WLC distribution system ports into a single 802.3ad port channel. B. There can be only one AP-manager interface if LAG is enabled C. LAG configuration changes take effect immediately after they are configured D. Channel negotiation LACP and PAGP are supported Answer: AB QUESTION 7 You have configured video stream on a Cisco WLC and users are now viewing the company video broadcast over the wireless network, how can you verify you have video stream configured and working in the Cisco WLC GUI? A. The multicast status shows "normalmulticast" in the multicast group detail B. The multicast status shows "MediaStream allowed" in the multicast group detail C. The WMM state shows "Enabled" in the clients detail D. The multicast status shows "multicast-direct allowed" in the multicast group detail Answer: D QUESTION 8 Refer to the exhibit. APs on VLAN 2100 can get IP address but cannot register to the WLC. The IP address of the WLC management interface is 24.244.4.227. Which option is the correct DHCP option 43 configuration.?

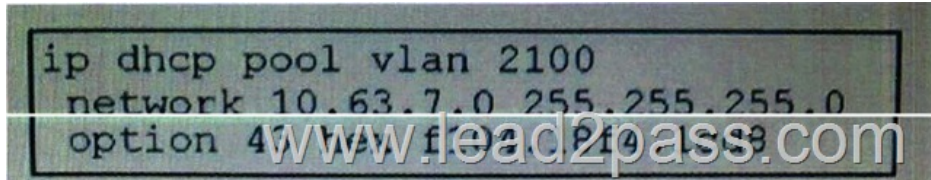

A. f10412f41cd9 B. f10418f404227 C. f10818f41cd0a181cf4a01c D. f10418f404e3 E. f1040a3f0701 Answer: D QUESTION 9 Which two statements describe characteristics of high availability Cisco 5760 wireless LAN controller that uses the stackwise-480 technology? (choose two) A. A switch stack has only three WLCs one active WLC and two standby WLCs B. If the WLC becomes unavailable the standby assumes the role of the active and continues to keep the stack operational. C. A switch stack has only two WLCs both WLCs are in active/active mode D. A switch stack has only two WLCs one active and one standby WLC. Answer: BD QUESTION 10 Which option in the Cisco Identity Service Engine allows for authorization based on Active Directory user and domain computer login? A. Machine access restriction B. Active directory group C. Active directory attributes D. Identity source sequences Answer: A Latest 400-351 questions and answers from Cisco Exam Center offered by Lead2pass for free share now! Read and remember all real questions answers, Guarantee pass 400-351 real test 100% or full money back! 2016 Cisco 400-351 exam dumps (All 156 Q&As) from Lead2pass: <http://www.lead2pass.com/400-351.html> [100% Exam Pass Guaranteed]