

## [Full Version 2016 New Released Cisco 300-370 Exam Dumps Free Download In Lead2pass (41-50)

2016 December Cisco Official New Released 300-370 Dumps in Lead2pass.com! 100% Free Download! 100% Pass Guaranteed! We are all well aware that a major problem in the IT industry is that there is a lack of quality study materials. Our exam preparation material provides you everything you will need to take a certification examination. Our Cisco 300-370 Exam will provide you with exam questions with verified answers that reflect the actual exam. These questions and answers provide you with the experience of taking the actual test. High quality and value for the 300-370 Exam. 100% guarantee to pass your Cisco 300-370 exam and get your Cisco certification. Following questions and answers are all new published by Cisco Official Exam Center:

<http://www.lead2pass.com/300-370.html> QUESTION 41 Refer to the exhibit. A new wireless deployment with high AP density is experiencing high latency and connectivity issues on the 24 GHz band, despite an initial site survey done by a certified partner. Which option is the most impactful change a wireless consultant recommends?




802.11b/g Global Parameters		Data Rates**
<b>General</b>		
802.11b/g Network Status	<input checked="" type="checkbox"/> Enabled	1 Mbps
802.11g Support	<input checked="" type="checkbox"/> Enabled	2 Mbps
Beacon Period (milliseconds)	100	5.5 Mbps
Short Preamble	<input checked="" type="checkbox"/> Enabled	6 Mbps
Fragmentation Threshold (bytes)	2346	9 Mbps
DTPC Support	<input checked="" type="checkbox"/> Enabled	11 Mbps
Maximum Allowed Clients	200	12 Mbps
RSSI Low Check	<input checked="" type="checkbox"/> Enabled	18 Mbps
RSSI Threshold (-60 to -90 dBm)	-80	24 Mbps
<b>CCX Location Measurement</b>		
Mode		48 Mbps
Interval (seconds)	0	5 Mbps

A. Increase the fragmentation threshold to allow larger packets over the air. B. Reduce the beacon period because it reduces the RF interference. C. Disable lower data rate, such as 1 Mbps and 2 Mbps. D. Disable the short preamble. E. Disable 80211g support to reduce interference. Answer: C QUESTION 42 An engineer is concerned about rogue-on-wire and wants to enable port security. Which guideline must the engineer follow? A. Configure Switched Port Analyzer destination ports as secure. B. Use 802 1x with port security to prevent MAC spoofing. C. Enable port security on dynamic access ports. D. Employ static MAC address configuration for APs with port security. Answer: A QUESTION 43 An alarm is reporting that one of four ports of a lag group have gone down on a wireless LAN controller. Which troubleshooting methodology can be used to begin the troubleshooting process? A. shoot from the hip B. bottom-up C. top-down D. follow the path E. divide and conquer Answer: B QUESTION 44 Which ports require unrestricted port access for CleanAir RF spectrum analysis between the AP and Cisco Spectrum Expert? A. UDP 5246 and 5247 B. UDP 37540 and 37550 C. TCP 16113 and 16114 D. TCP 37540 and 37550 E. TCP 5246 and 5247 F. UDP 16113and 16114 Answer: D QUESTION 45 Refer to the exhibit. A client reports being unable to log into the wireless network, which uses PEAPv2. Which two issues appear in the output? (Choose two)



```
Dec 7 13:56:09.373: dot11_auth_dot1x_start: in the dot11_auth_dot1x_send_id_req_to_client:
Dec 7 13:56:09.373: dot11_auth_dot1x_send_id_req_to_client:
sending identity request for 0040.96a0.3758
Dec 7 13:56:09.374: dot11_auth_dot1x_send_id_req_to_client:
Started timer client_timeout 30 seconds
Dec 7 13:56:39.358: dot11_auth_dot1x_run_ifsm:
Executing Action(CLIENT_WAIT, TIMEOUT) for 0040.96a0.3758
Dec 7 13:56:39.358: dot11_auth_dot1x_send_client_fail:
Authentication failed for 0040.96a0.3758
Dec 7 13:56:39.358: DOT11_AUTH_DOT1X_SEND_CLIENT_FAIL:
Status: AUTH_FAILED (code: 0)
```

A. The AP has the incorrect RADIUS server address B. There is a problem with the client supplicant C. The AP has lost IP connectivity to the authentication server D. The authentic at ion server is misconfigured on the controller E. The EAP client timeout value should be increased F. The authentication server is misconfigured in the WLAN Answer: AE QUESTION 46 A Cisco WLC v7.0 is not seeing an AP join. Which starting prefix debug command can help determine a combination of discovery/join and DHCP process status? A. debug capwap events - from Cisco WLC B. debug capwap events - from the AP C. debug ip udp - from Cisco WLC D. debug ip udp - from the AP Answer: D QUESTION 47 Refer to the exhibit. Which two statements about the WLAN are true? (Choose two)

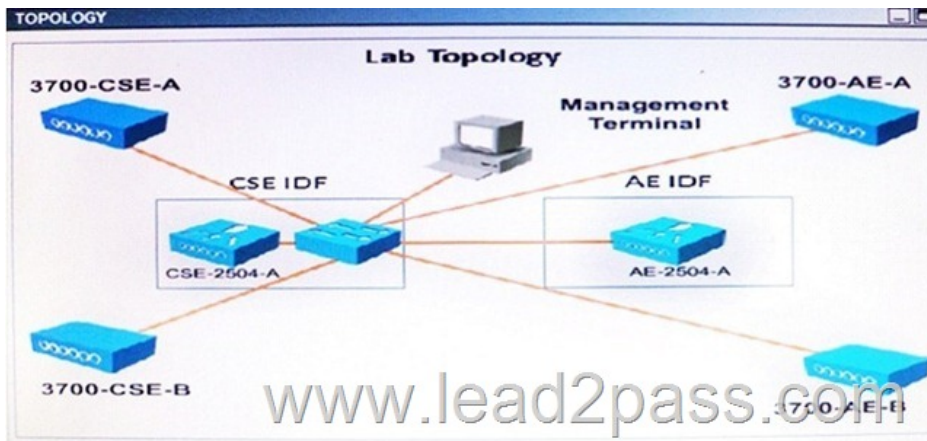

Packet	Source	Destination	Channel	Data Rate	Size	Protocol
3377	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	48	EAP Response
3378	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3379	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	85	EAP Request
3380	Intel:2F:D3:70	Cisco:10:44:EF	136	6.0	101	EAP Response
3381	Cisco:10:44:EF	Intel:2F:D3:70	136	6.0	18	802.11 Ack
3382	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	117	EAP Request
3383	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	149	EAP Response
3384	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3385	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	133	EAP Request
3386	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	85	EAP Response
3387	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3388	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	85	EAP Response
3389	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3390	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	46	EAP Success
3391	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	159	EAPOL-Key
3392	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	161	EAPOL-Key
3393	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3394	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	193	EAPOL-Key
3395	Intel:2F:D3:70	Cisco:10:44:EF	136	24.0	137	EAPOL-Key
3396	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	18	802.11 Ack
3397	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	24	802.11 RTS
3398	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	108	802.11 Encrypted Data
3399	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	47	802.11 Encrypted Data
3400	Cisco:10:44:EF	Intel:2F:D3:70	136	24.0	47	802.11 Encrypted Data

A. The client has a 5 GHz connection. B. The client has authenticated. C. The client is 802.11n capable. D. The Cisco device is a 3600 series AP. E. 802.11b data rates are disabled in this WLAN Answer: AB QUESTION 48 Which feature should a network engineer enable within a mixed-client network to ensure that the legacy client operates at the best possible rates? A. ClientLink B. RRM C. DCA D. Band Select Answer: A QUESTION 49 A wireless user is experiencing connectivity issues with their Mac OS laptop. If the Mac is exhibiting the behavior of a "sticky client," how can the tech verify which AP the user is currently connected to? A. Hold shift while clicking the wireless icon. B. Hold option while clicking the wireless icon. C. Hold control while clicking the wireless icon. D. Hold command while clicking the wireless icon. Answer: B QUESTION 50 A network engineer is troubleshooting why EAP authentication with a client is failing. Which two commands should be used to resolve the issue? (Choose two) A. debug dot1x notifications enable B. debug dot1x events enable C. debug arp D. debug aaa detail enable E. debug aaa events detail enable Answer: BE The Cisco 300-370 questions and answers in PDF on Lead2pass are the most reliable study guide for 300-370 exam. Comparing with others', our 300-370 dump is more authoritative and complete. We provide the latest full version of 300-370 PDF and VCE dumps with new real questions and answers to ensure your 300-370 exam 100% pass. 300-370 new questions on Google Drive: <https://drive.google.com/open?id=0B3Syig5i8gpDeXZTcXZnWk5naVU> 2016 Cisco 300-370 exam dumps (All 70 Q&As) from Lead2pass: <http://www.lead2pass.com/300-370.html> [100% Exam Pass Guaranteed]